


# Type LS


Providing excellent corrosion resistance, Lindapter's stainless steel clamp self-adjusts to suit a range of flange thicknesses.

Nose



Tail

STAINLESS STEEL Grade 316

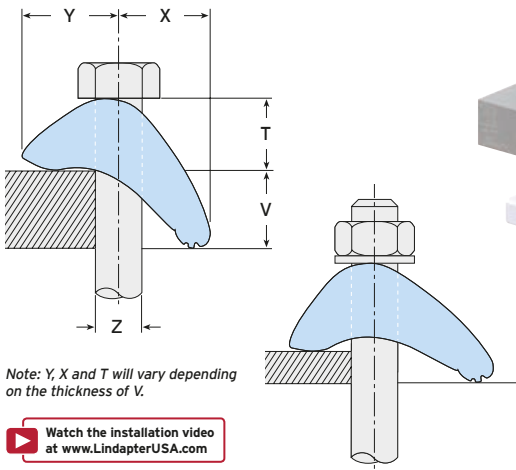

Note: Y, X and T will vary depending on the thickness of V.

▶ Watch the installation video at [www.LindapterUSA.com](http://www.LindapterUSA.com)



- Made from high strength stainless steel grade 316.
- Self-adjusts to suit a range of flange thicknesses.
- For parallel and tapered flanges up to 10°.
- The tail spans slotted clearance holes.

▶ See page 21 for the packing pieces available to increase the clamping range, as well as location and end plate details.

Material: Cast stainless steel grade 316.



Product Code	Bolt A4-70 Z	Safe Working Loads		Tightening Torque*	Clamping Range <sup>2)</sup> V	Dimensions			Width
		Tensile Resistance / 1 Bolt (FOS 5:1) lbs	Slip Resistance <sup>1)</sup> / 2 Bolts (FOS 2:1) lbs			Y	X	T	
LLS037	3/8"	675	337	30	1/8" - 9/16"	5/8" - 3/4"	11/16" - 15/16"	5/8" - 13/16"	1 1/2"
LLS050	1/2"	1574	450	60	1/8" - 13/16"	5/8" - 7/8"	11/16" - 1 1/8"	5/8" - 7/8"	1 9/16"
LLS062	5/8"	2248	675	148	1/8" - 1"	7/8" - 1"	1 1/16" - 1 7/16"	3/4" - 1 1/8"	2 3/16"
LLS075	3/4"	4047	1124	295	1/8" - 13/16"	15/16" - 1 1/4"	1" - 1 5/8"	7/8" - 1 1/4"	2 3/8"

1) Slip resistance loads calculated against slip (movement exceeding 0.004" / 0.1mm).

2) For thicker flanges, see the packing pieces on page 21.

\* Torque figures based on bolts / setscrews in an unlubricated condition. For further information on lubricated fasteners see page 58.