
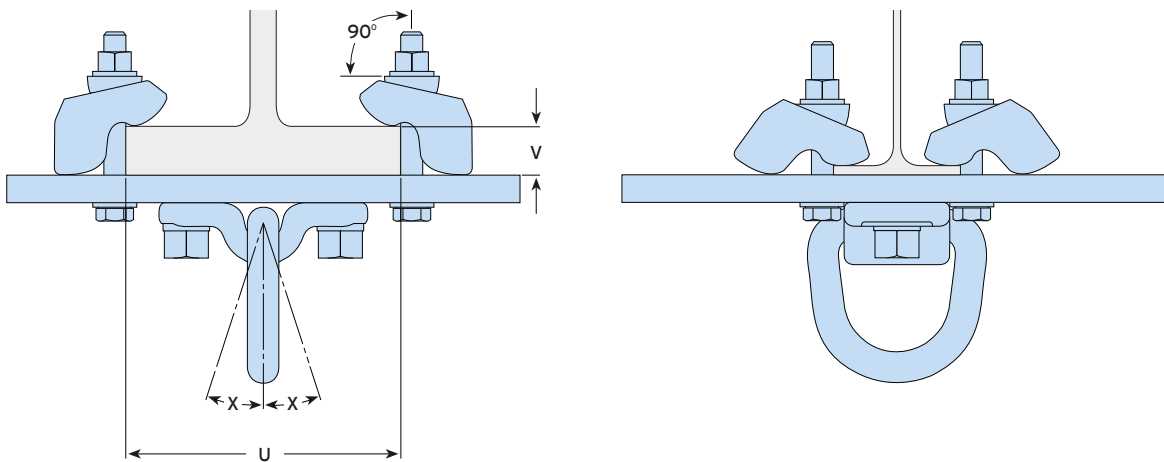


Type ALP

Lindapter's standard rigging and lifting solution adjusts to suit the beam width, flange thickness and orientation of the lift. Safely supports loads up to 6,600lbs.

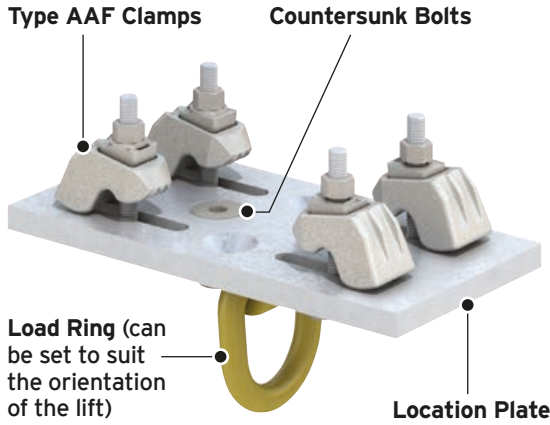

- Available 'off-the-shelf' with a safe working load up to 6,600lbs.
- Adjusts to fit different sized beams and can be easily repositioned.
- Suitable for parallel and tapered beams up to 10°.
- Large load ring can be rotated 90° to suit the orientation of the lift.

- Ensure that the supporting steel is suitable for the applied load.
- For larger steel sections or heavier loads, please refer to Type LP (page 35), Lindapter's custom Lifting Points manufactured to suit individual applications.

Material: Type AAF clamps (low temperature SG iron, hot dip galvanized), Location Plate (mild steel, hot dip galvanized) and Load Ring (forged steel, painted).

Product Code	Torque Figures				Clamping Range		Safe Working Loads (FOS 4:1) lbs	Max Angle of Load X
	Load Ring Countersunk Bolts*		Type AAF Set Screws*		Flange Thickness V	Beam Width U		
	10.9 Bolt	Torque ft lb	8.8 Bolt	Torque ft lb				
LALP 3T-1	M16 (5/8")	74	M12 (1/2")	66	3/16" - 1"	2 3/4" - 8 1/4"	6600	18°
LALP 3T-2	M16 (5/8")	74	M12 (1/2")	66	3/16" - 1"	7 1/2" - 13"	6600	18°
LALP 3T-3	M16 (5/8")	74	M12 (1/2")	66	3/16" - 1"	12 3/16" - 17 3/4"	6600	18°

* Metric bolts, nearest imperial / UNC equivalent shown in brackets.

GIRDER CLAMPS
RAIL CONNECTIONS
LIFTING POINTS
HOLLO-BOLT
FLOOR CONNECTIONS
PIPE SUPPORTS
FAQS & CASE STUDIES