
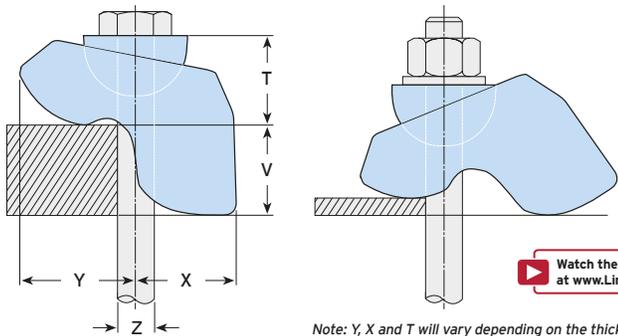


Type AAF

This adjustable High Slip Resistance clamp is easy to install and provides high load capacities even in low temperature environments down to -76°F.

Rocking Washer

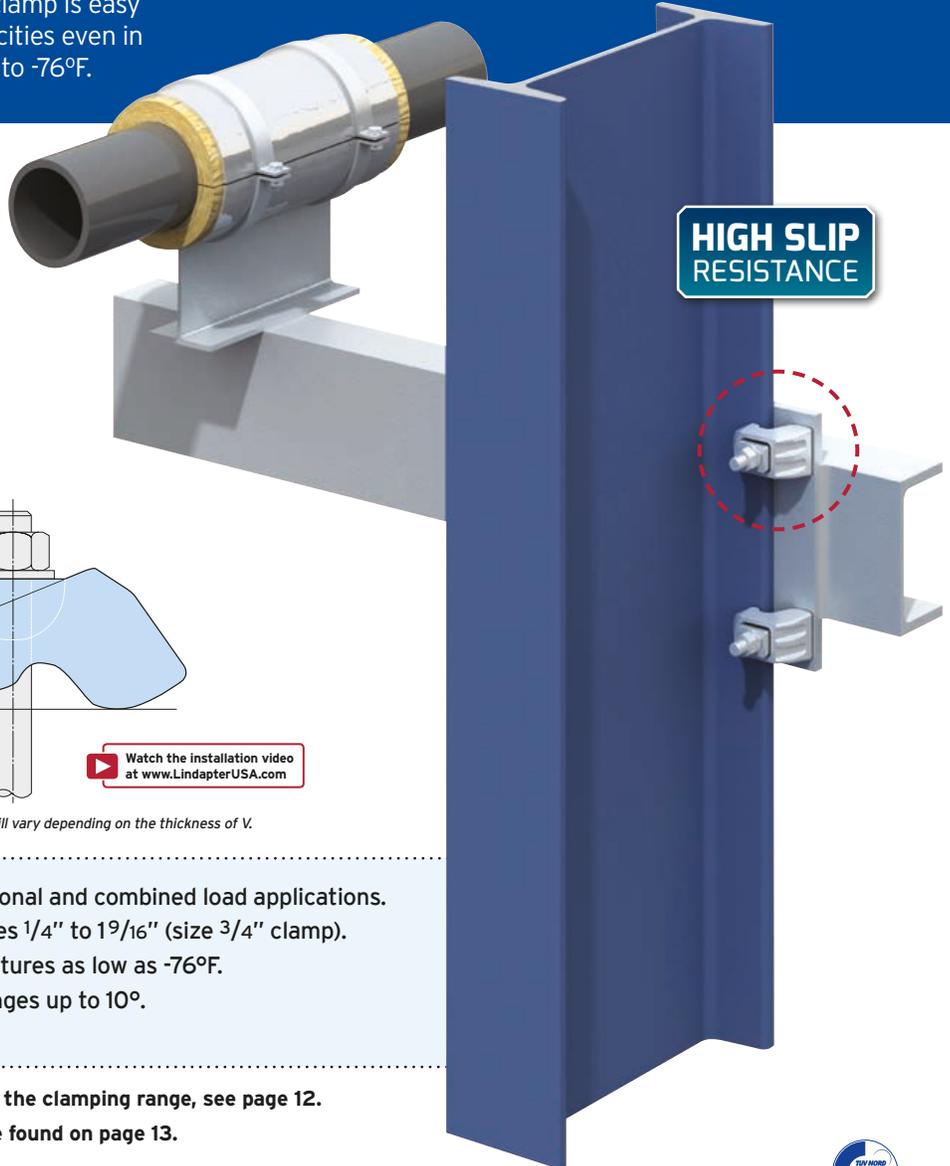

Watch the installation video at www.LindapterUSA.com

- High slip resistance for tensile, frictional and combined load applications.
- Self-adjusts to suit flange thicknesses 1/4" to 19/16" (size 3/4" clamp).
- Safe working loads apply in temperatures as low as -76°F.
- Suitable for parallel and tapered flanges up to 10°.
- Hot dip galvanized as standard.

- ▶ Packing pieces are available to increase the clamping range, see page 12.
- ▶ Location plate / end plate details can be found on page 13.

Material: Low temperature SG iron, hot dip galvanized.



Product Code	Bolt		Safe Working Loads			Tightening Torque*	Clamping Range ³⁾ V	Dimensions			Width
	Size Z	Grade	Tensile Resistance / 1 Bolt (FOS 4.5:1)	Slip Resistance ¹⁾ / 2 Bolts (FOS 2:1)				Y	X	T	
				Painted Steel ²⁾	Galv. Steel						
			lbs	lbs	lbs	ft lb					
LAAF050	1/2"	Gr. 5 / A325	1911	764	877	66	3/16" - 1"	1" - 15/16"	1 1/16" - 1 15/16"	1 1/32" - 1 3/8"	1 5/8"
LAAF062	5/8"	Gr. 5 / A325	3597	1798	2248	177	1/4" - 1 3/16"	1 5/16" - 2"	1 1/4" - 2 5/16"	1 3/8" - 1 13/16"	2 3/16"
LAAF075	3/4"	Gr. 5 / A325	5901	2922	3597	347	1/4" - 1 9/16"	1 7/8" - 3 1/16"	1 15/16" - 2 1/2"	2 1/16" - 2 1/2"	3"
LAAF050	1/2"	A490	2248	899	1169	96	3/16" - 1"	1" - 1 5/16"	1 1/16" - 1 15/16"	1 1/32" - 1 3/8"	1 5/8"
LAAF062	5/8"	A490	4383	2473	2698	221	1/4" - 1 3/16"	1 5/16" - 2"	1 1/4" - 2 5/16"	1 3/8" - 1 13/16"	2 3/16"
LAAF075	3/4"	A490	6744	4496	5620	477	1/4" - 1 9/16"	1 7/8" - 3 1/16"	1 15/16" - 2 1/2"	2 1/16" - 2 1/2"	3"

1) Slip Resistance figures are based on Type AAF and Location Plates in hot dip galvanized finish calculated against slip (movement exceeding 0.004" / 0.1mm).
 2) Shot blast and painted steel.
 3) For thicker flanges, see the packing pieces on page 12.
 * Torque figures based on bolts / setscrews in an unlubricated condition. For further information on lubricated fasteners see page 58.

GIRDER CLAMPS
 RAIL CONNECTIONS
 LIFTING POINTS
 HOLLO-BOLT
 FLOOR CONNECTIONS
 PIPE SUPPORTS
 FAQs & CASE STUDIES