
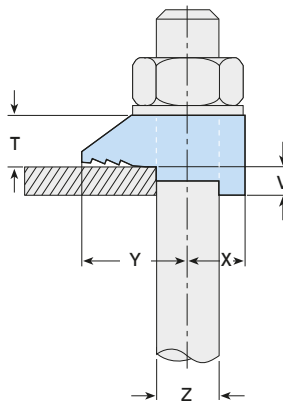


Type B

The flat-top version of Lindapter's standard clamp, for moderate tensile loading. Can also be used with Type A in a Girder Clamp configuration.

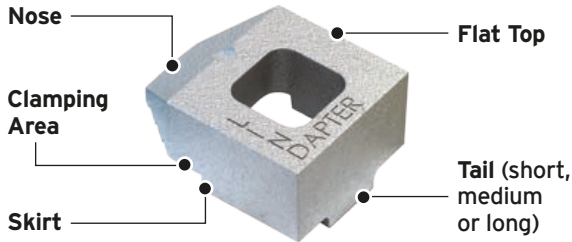

▶ Watch the installation video at www.LindapterUSA.com

- CE Mark, DIBt, Lloyd's Register and TÜV approved.
- Flat top allows the bolt head or nut to rotate.
- Suitable for use with bolts, studs, tie rods and J-bolts.
- Supports up to 17,720lbs tensile load in a four bolt configuration.
- For higher loads the Type AF should be used, see [page 10](#).

- ▶ Packing pieces are available to increase the clamping range, see [page 18](#).
- ▶ Location plate / end plate details can be found on [page 19](#).

Material: Malleable iron, zinc plated / hot dip galvanized.



Product Code	Bolt Grd. 5 / A325 Z	Safe Working Loads (FOS 5:1)			Tightening Torque*	Y	X	Dimensions			T	Width
		Tensile Resistance / 1 Bolt lbs	Slip Resistance / 2 Bolts lbs	Tail Length V								
				short				medium	long			
LB037 ¹⁾	3/8"	330	-	15	13/16"	7/16"	5/32"	3/16"	9/32"	3/8"	1"	
LB050	1/2"	1300	157	50	1"	1/2"	3/16"	1/4"	3/8"	1/2"	1 1/8"	
LB062	5/8"	1640	337	108	13/16"	5/8"	1/4"	5/16"	7/16"	5/8"	1 3/8"	
LB075	3/4"	3300	674	210	17/16"	3/4"	5/16"	3/8"	1/2"	3/4"	1 13/16"	
LB100	1"	4430	1012	362	17/8"	1"	3/8"	1/2"	5/8"	1"	2 1/8"	

1) Requires a thick flat washer under the bolt head.

* Torque figures based on bolts / setscrews in an unlubricated condition. For further information on lubricated fasteners see [page 58](#).