
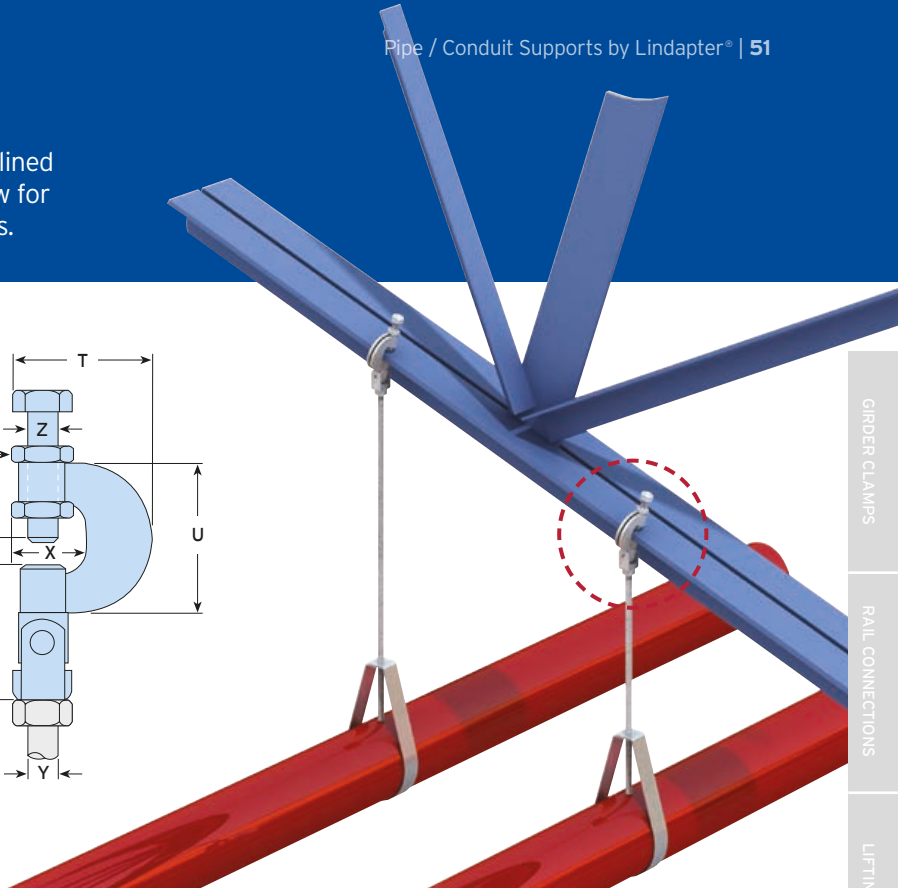
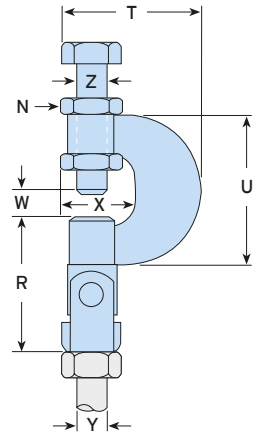


Type FLS

A versatile flange clamp with a swivel unit for inclined applications. Supplied with a high tensile setscrew for a secure grip on both parallel and tapered flanges.

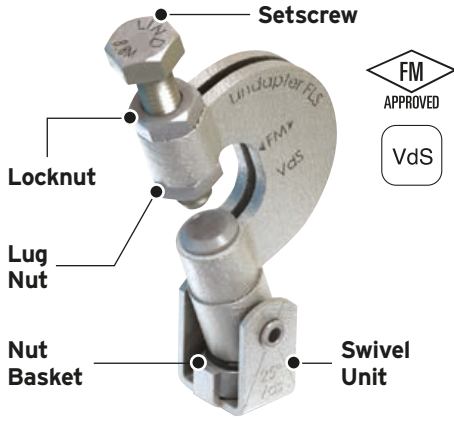


Material: High grade alloy steel, zinc plated.


Product Code	Rod Y	Safe Working Load (FOS 4:1)		Clamping Range W	Setscrew* Z	Tightening Torque		Dimensions				
		Tensile ≤ 25° lbs	Tensile 25° to 45° lbs			Setscrew Z ft lb	Locknut N ft lb	R	T	U	X	Width
LFLS037	3/8" UNC	550	330	1/8" - 11/16"	M10 (3/8")	13	13	2 3/16"	2 1/8"	2 1/4"	1 1/16"	1 1/8"

* Metric setscrew supplied.

Independently Approved Applications

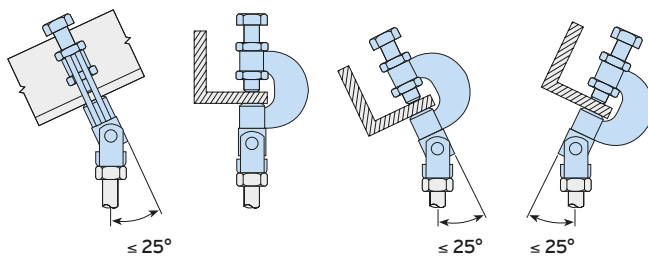


General Applications (Parallel Flanges only)

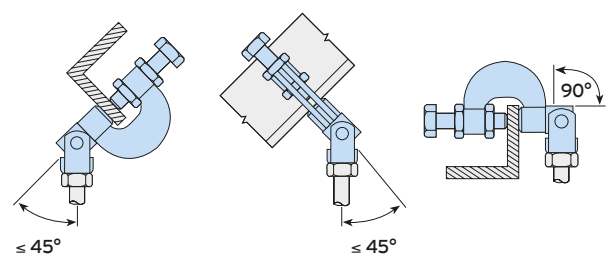

How to install...

- 1) Locate the FLS onto the flange.
- 2) Ensuring the lug nut (M) locates into the main body, tighten down the setscrew (Z) and locknut (N).
- 3) Install the 3/8" UNC threaded rod by screwing into the nut located in the nut basket (S). Ensure full thread capture.
- 4) Secure assembly in nut basket (S) from beneath using a nut (not supplied).

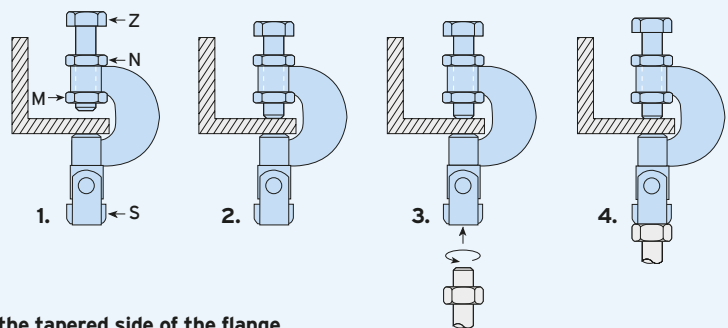

➔ Ensure that the cup point setscrew always grips on the tapered side of the flange.

GIRDER CLAMPS

RAIL CONNECTIONS

LIFTING POINTS

HOLLO-BOLT

FLOOR CONNECTIONS

PIPE SUPPORTS

FAQS & CASE STUDIES